

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Gerd SPALINK et al.

International Application No.: PCT/EP2003/007138

International Filing Date: July 3, 2003

For: CONVERGENCE LAYERS FOR NETWORK DEVICES
AND METHOD FOR TRANSMITTING DATA
TRAFFIC

745 Fifth Avenue
New York, NY 10151

EXPRESS MAIL

Mailing Label Number: EV206809658US

Date of Deposit: January 7, 2005

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" Service under 37 CFR 1.10 on the date indicated above and is addressed to Mail Stop PCT, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Adam Ahmed

(Typed or printed name of person mailing paper or fee)

A. Ahmed

(Signature of person mailing paper or fee)

CLAIM OF PRIORITY UNDER 37 C.F.R. § 1.78(a)(2)

Mail Stop PCT
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Pursuant to 35 U.S.C. 119, this application is entitled to a claim of priority to European Application No. 02 015 204.7 filed 08 July 2002.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicants

By: William S. Frommer

William S. Frommer
Reg. No. 25,506
Tel. (212) 588-0800


Rec'd PCT/PTO 07 JAN 2005
PCT/EP 03707138#1



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02015204.7

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr.:
Application no.: 02015204.7
Demande no:

Anmeldetag:
Date of filing: 08.07.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Sony International (Europe) GmbH
Kemperplatz 1
10785 Berlin
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Convergence layers for network devices and method for transmitting data traffic

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04L/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

MÜLLER · HOFFMANN & PARTNER - PATENTANWÄLTE

European Patent Attorneys – European Trademark Attorneys

Innere Wiener Strasse 17
D-81667 München

EPO - Munich
68
08. Juli 2002

Attorney's File: 54.134

Applicant's Case: S02P5021EP00/PAE01-117HN

Gö/Leh
08.07.2002

Sony International (Europe) GmbH

Kemperplatz 1
D-10785 Berlin
Germany

**Convergence layers for network devices and
method for transmitting data traffic**

Description

The invention is related to a network device for use in an ad-hoc established device network, to a device network, and to a method for transmitting data traffic
5 via a device network.

For a variety of home multimedia applications and business applications, it is important to establish networks, preferably wireless networks, for exchanging data and messages between different devices that are part of the network. In a
10 typical business application scenario, a mobile terminal gets services over a fixed corporate or public infrastructure. In an exemplary home application scenario, a low-cost and flexible networking is supported to interconnect wireless digital consumer devices.

15 The ETSI Project BRAN (Broadband Radio Access Networks) has defined the standard HiperLAN (High Performance Radio Local Area Network), which provides high-speed multimedia communications between different broadband core networks and mobile terminals. HiperLAN/2 provides a flexible platform for a variety of business and home applications that can support a set of bit rates up
20 to 54 Mbit/s. The HiperLAN/2 standard is an example how data can be transmitted between different devices in a wireless network. The invention is not limited to wireless networks according to the HiperLAN/2 standard, though. The invention is not limited to wireless networks. It can also be applied in wired networks.

25

A typical device network comprises several devices, with one of the devices acting as a controller that controls the other devices that act as mobile terminals. When different devices are brought within reach of each other, they start exchanging messages and establish a so-called ad-hoc network, with one of the devices
30 assuming the control functionality.

In section 6.2 of ETSI BRAN HiperLAN2 Standard Spec: DLC home extension (ETSI TS 101 761-4 V1.3.2 (2002-01)), it is described how multiple convergence layers supporting different external networking standards can be active
35 simultaneously within one wireless local area network.

It is an object of the invention to provide a network device and a method for routing data traffic of an external networking protocol through a local area network, whereby interoperability between different external networking technologies is supported.

5

The object of the invention is solved by a network device according to claim 1, by a device network according to claim 13, and by a method for transmitting data traffic via a device network according to claim 21. A computer program product according to the present invention is defined in claim 24 and a computer
10 readable storage medium is defined in claim 25.

According to the invention, the network device for a device network comprises a content detection layer for detecting the content type of external traffic received by said network device. In dependence of the detected content type, said external
15 traffic is passed to a content-specific convergence layer that is dedicated to handling the respective content type. Furthermore, the network device comprises a set of content-specific convergence layers, which exchange network traffic with other network devices of said device network via content-specific connections. Said content-specific connections are suited to the requirements of the respective
20 content type.

In prior art solutions, external traffic received by a network device has been passed, according to the protocol of said external traffic, to a protocol-specific convergence layer. For example, IEEE 1394 data traffic has always been handled
25 by a IEEE 1394-specific convergence layer, and Ethernet traffic has been handled by an Ethernet-specific convergence layer. The respective convergence layer has been responsible for transmitting the external traffic to its respective target network device, whereby the connection for transmitting the external traffic within the device network has been set up according to said external
30 network.

According to the invention, when external traffic is received by a network device, the content type of said external traffic is detected by a content detection layer. For example, it might be detected that the external traffic is "packet-based data
35 traffic". Alternatively, said external traffic might be "real-time critical data traffic", for example an audio or video data stream. When the content type has been detected, the received data traffic is passed to a convergence layer that is specific for said type of content. Thus, instead of protocol-specific convergence

layers, content-specific convergence layers are used for setting up and releasing connections to other network devices within the network, and for transmitting data traffic within the device network. The content specific connections that are built up by the content-specific convergence layers are suited to the requirements of the respective content type.

The invention is based on the fact that the requirements for a data transmission within a device network do not depend on the protocol of the external traffic in the first place. It is possible to transmit packet-based data traffic via a IEEE 1394 interface (IPover1394), though the standard IEEE 1394 is mostly used for the transmission of video data streams. Vice versa, it is also possible to transmit real-time critical data via an IP network, which is typically used for packet-based data transmission. The requirements for a data transmission within the device network depend in the first place on the content type of the external traffic. The requirements imposed by the content type define the parameters of the data connection that is established between the source network device and the target network device. For example, a real-time critical video data stream requires that the transmission delay never exceeds a predefined threshold, and that a fixed bandwidth is permanently available for said data transmission. Generally, there are no such restrictive requirements for packet-based data transmission.

According to the invention, for each content type, a specific convergence layer is provided, which handles data streams of said content type according to the content-specific requirements. The content-specific convergence layers are responsible for establishing and releasing content-specific connections within the device network, and for transmitting the respective external data traffic within the device network.

Within the network, the external traffic is transmitted from the source network device, which has received said traffic from an external network, to a target network device. On the part of the target network device, the arriving data stream is taken care of by a corresponding convergence layer that is responsible for the respective content type. To said target network device, any external network may be connected. The convergence layer on part of the target network device doesn't have to route the traffic to the external protocol said traffic has emanated from. Instead, the received data traffic may be mapped to any external protocol that is able to accept the respective content type. For example, a video data stream emanating from a IEEE 1394 interface can be mapped, after it has

been transmitted within the device network, to a IEEE 1394 interface again. Alternatively, the video data stream can also be mapped, on part of the target network device, to an IP interface. This kind of data exchange between different external networking technologies has not been possible in the prior art. The
5 inventive concept of content-specific convergence layers allows for an interoperability between different external networking standards. In case two completely different external network protocols can handle the same content type, it is possible to receive external traffic of a first external protocol, route said traffic through the device network, whereby an internal protocol is used,
10 and map the traffic, on the part of the receiving network device, to a second external protocol. The device network can be seen as an adapting means for adapting a first kind of external traffic to a second kind of external traffic.

One advantage of the inventive solution is that the available bandwidth of the
15 device network is used more effectively by allowing access to different traffic types. Another advantage is that new networking technologies and traffic types can be integrated easily into the existing convergence layer architecture. Due to the generic design of the relevant modules, large amounts of existing code can be reused in the process of the integration.

20 Preferably, one of said content types is real-time critical data, whereby said set of content-specific convergence layers comprises a convergence layer dedicated to handling real-time critical data. When real-time critical data, for example an audio or video data stream, is transmitted from a first network device to another
25 network device of the device network, the following requirements have to be fulfilled: First of all, transmission delays that exceed a certain amount are not acceptable. Furthermore, for the transmission of a real-time critical data stream, a certain bandwidth has to be permanently available in order to allow for a continuous transmission of said data stream. A convergence layer dedicated to
30 handling real-time critical data can set up content-specific connections within the device network that allow to fulfil the above-mentioned requirements.

Further preferably, one of said content types is packet-based data, whereby said
35 set of content-specific convergence layers comprises a convergence layer dedicated to handling packet-based data. When regular packet-based data traffic has to be transmitted within the device network, there are no specific requirements concerning the transmission delay and available bandwidth as there are in case of real-time critical data. A convergence layer dedicated to

handling packet-based data will therefore set up a content-specific connection for the transmission of said data, whereby the available network resources are used in a more flexible way. In particular, it is not necessary to reserve a predefined bandwidth for the transmission of said packet-based data.

5

According to a preferred embodiment of the invention, said external traffic is at least one of Ethernet traffic, IEEE 1394 traffic, UMTS traffic or PPP traffic. The Ethernet protocol is the major protocol for accessing the internet. IEEE 1394 is the most common standard for data exchange between audio and video devices and allows for large transmission bit rates. UMTS is an example for a third generation mobile communications protocol, and PPP (point-to-point protocol) permits to establish point-to-point connections between two devices. Thus, the network device can be connected to a large range of current networking technologies simultaneously.

15

Preferably, said network device comprises hardware connectivity for at least one of Ethernet traffic, IEEE 1394 traffic, UMTS traffic or PPP traffic. Data packets received via said hardware connections are converted into the internal network protocol of the device network. Vice versa, data packets of the internal network protocol received from other network devices are converted into data packets of the external networking technology. Then, these data packets are sent to the external network via said hardware connection.

Preferably, said network device is an access point of said device network. The task of an access point is to provide access to different external networking technologies and networking services, for example to the internet. Therefore, the access points should be equipped with multiple content-specific convergence layers in the first place, because said access points have to handle different kinds of data traffic received from various external networks.

30

According to a preferred embodiment of the invention, said content detection layer analyses if said Ethernet traffic is real-time critical traffic, e.g. in connection with RTP, RTCP, RSVP, or RTSP traffic, whereby in case said Ethernet traffic is real-time critical, it is passed to a convergence layer dedicated to handling real-time critical data. Each data packet of Ethernet data traffic comprises type field information indicating the content of the respective Ethernet data packet. Thus, the content detection layer can easily determine if said Ethernet traffic is real-time critical or not. If the result of analysing the type field

35

information is that said Ethernet traffic is real-time critical, it is passed to the convergence layer that handles real-time critical data. Therefore, in the case of Ethernet packets, the detection of the respective content type can be implemented in a very simple way.

5

Further preferably, said content detection layer analyses if said Ethernet traffic is not real-time critical traffic, i.e. of some other protocol type and thus packet-based traffic, whereby in case said Ethernet traffic is not real-time critical, it is passed to a convergence layer dedicated to handling packet-based data. The type field information of an Ethernet packet indicates the content of said data packet. The content detection layer can easily detect whether the received Ethernet traffic is packet-based data traffic or not. Packet-based data traffic is passed to a convergence layer dedicated to handling this content type.

10

15 Preferably, said content detection layer analyses if said IEEE 1394 traffic is packet-based data traffic, whereby in case said IEEE 1394 traffic is packet-based data traffic, it is passed to a convergence layer dedicated to handling packet-based data. Further preferably, said content detection layer analyses if said IEEE 1394 traffic is real-time critical data traffic, whereby in case said IEEE 1394 traffic is real-time critical data traffic, it is passed to a convergence layer dedicated to handling real-time critical data. Via a IEEE 1394 interface, either real-time critical IEEE 1394 data traffic or packet-based data traffic (IPover1394) can be transmitted. Also with regard to 1394 traffic, it is possible to analyse at low expense the respective content type. According to the content type, the IEEE 1394 traffic is either passed to a convergence layer for handling real-time critical data, or to a convergence layer for handling packet-based data traffic.

20

25

According to a preferred embodiment of the invention, said content-specific convergence layers comprise a common part, which segments data packets of said external traffic into a multitude of corresponding data packets of said device network's internal protocol, and which reassembles data packets of said device network's internal protocol into corresponding data packets of the respective external traffic. All the external networking technologies mentioned so far have one thing in common: They use variable size data packets which comprise more bytes than the rather small LCH (Long Transport Channel) data packets used within the HiperLAN/2 network, which only comprise 48 bytes. Therefore, data packets of the external protocol have to be segmented into a multitude of HiperLAN/2 data packets. Data packets received from the HiperLAN/2 network

30

35

have to be reassembled into the data packets of the respective external protocol. Instead of providing each one of the convergence layers with a unit for segmenting and reassembling data packets, this task is accomplished, for all the convergence layers, by the common part of the convergence layers. The common
5 part segments data packets arriving from the respective external network into a multitude of data packets of the internal network's protocol, and reassembles data packets of the internal protocol into variable size data packets of the respective external protocol. By implementing said common part, the structure of the content-specific convergence layers can be simplified. Another advantage is
10 that in case a new convergence layer for another content type is to be implemented, programming said new convergence layer is simplified, because the functionality of the common part can be used.

Preferably, said content-specific convergence layers are operable to be used
15 simultaneously within the same device network. Therefore, a network device can simultaneously handle data streams of different content type.

According to the invention, a device network is set up, which comprises at least one network device with a content detection layer, and with a set of content-
20 specific convergence layers as described above.

Preferably, content-specific connections are set up and released between the network devices of said device network, whereby a content-specific connection is set up between a content-specific convergence layer of a first network device
25 which supports a certain content type, and a respective content-specific convergence layer of a second network device which supports the same content type. Between convergence layers supporting the same content type, a connection can be established. As soon as the connection is established, any amount of data packets can be transmitted between the two content-specific
30 convergence layers. By defining content-specific connections for handling data transmissions within the ad-hoc established device network, it is possible to define the parameters of the data transmission according to the content type, and to choose these parameters according to the desired bandwidth, error handling, etc.

35

According to a preferred embodiment of the invention, the external traffic exchanged with said content-specific convergence layer of said first network device may be of a different kind than the external traffic exchanged with said

content-specific convergence layer of said second network device. On the part of the target network device, the received data stream may be forwarded to any external protocol that is willing and able to accept the respective content type. The data stream that has been transmitted via the ad-hoc established device
5 network can thus be distributed to an external network that is different from the external network the data stream has emanated from. Data traffic from a first external networking technology may be routed to a second external networking technology. The device network serves as an adapting means for all kinds of network traffic. This makes the device network, preferably the wireless LAN
10 technology, much more powerful and flexible.

Preferably, in case said content-specific connection is for a content type which requires a quality of service feature, a fixed bandwidth is reserved for said content-specific connection. The "quality of service" feature is a well-known
15 feature for the transmission of video data. A certain bandwidth is reserved for the transmission of the video data stream, and thus, a certain quality of service (QoS) is guaranteed. When transmitting video data streams or any other data traffic supporting the quality of service feature via a device network, it is possible to set up the connection in a way that the quality of service feature is
20 supported.

Further preferably, for each content-specific connection, the content type supported by said content-specific connection is registered. Any traffic transmitted via the content-specific connection can be passed, on the part of the
25 target network device, to the corresponding content-specific convergence layer dedicated to handling the respective content type.

Further preferably, said device network is a wireless local area network (WLAN), and in particular a HiperLAN/2 network. HiperLAN/2 is a European standard for
30 wireless local area networks.

According to a preferred embodiment of the invention, the exchange of control messages and data packets between different network devices of said device network is effected according to a TDMA transmission scheme. Preferably, a set
35 of time slots of said TDMA transmission scheme may be reserved for a certain content-specific connection. By doing this, a predefined transmission capacity can be assigned to a certain connection. This is one way of realizing the above-mentioned quality of service feature.

Further features and advantages of preferred embodiments according to the present invention will be explained below in conjunction with the accompanying drawings, in which

- 5 **Fig. 1** shows how different networking technologies interact in order to provide a networking environment;
- Fig. 2** shows a wireless local area network comprising two network devices according to the prior art;
- 10 **Fig. 3** shows a wireless local area network, whereby both real-time critical and regular packet-based data streams are transmitted via the wireless LAN;
- 15 **Fig. 4** depicts the structure of the protocol stack for the HiperLAN/2 standard; and
- Fig. 5** shows how higher layer packets, for example Ethernet packets, are mapped onto layers of the HiperLAN/2 standard.

20

Fig. 1 shows the interplay of different network protocols in a networking environment. The Internet 1 provides the backbone for all kinds of data exchange services. In an office environment 2, servers 3 and access points 4 for wireless data transmission are connected by means of the Ethernet protocol. In order to establish wireless local area networks for connecting mobile terminals 5 to said access points 4, the Ethernet protocol can be converted into a suitable protocol for wireless data transmission, e.g. into the HiperLAN/2 protocol. Also in a home environment 6, the HiperLAN/2 protocol is used for establishing an ad-hoc device network for exchanging data between audio and video devices 7, personal computers 8, organizers 9, etc. In the field of mobile communication 10, the standards GPRS and UMTS are used for exchanging data packets between mobile devices 11 and base stations 12, and for accessing the Internet 1. For small distances, the Bluetooth protocol is used. For all these applications, the Internet Service Provider 13 provides a high-bandwidth backbone 14 and all kinds of data exchange services (email, world wide web, WAP, FTP, etc.).

25

30

35

In Fig. 2, a wireless local area network of the prior art is shown. The wireless local area network comprises an access point 15, which acts as a central

controller for the network, and a mobile terminal 16. The mobile terminal 16 exchanges data packets with the access point 15 via the HiperLAN/2 protocol. The access point 15 comprises hardware connectivity for an external network protocol, the Network Type 1 (18), e.g. for the Ethernet. Furthermore, the access
5 point 15 comprises a Network Type 1 convergence layer 17 for converting data packets received via the Network Type 1 (18) into the HiperLAN/2 standard (19), and for converting data packets received via the HiperLAN/2 (19) into the Network Type 1 standard (18).

10 In Fig. 3, a device network comprising four network devices with content-specific convergence layers are shown. An Ethernet device 20, which is connected to the Ethernet via IP (Internet Protocol), is part of the device network 21. Preferably, the device network is a wireless local area network (LAN), in particular according to the HiperLAN/2 standard. The Ethernet device 20 can receive regular IP traffic
15 22 from the Internet. Regular packet-based IP traffic is transmitted according to protocols aside from those that are explicitly used for real-time critical data (e.g. RTP, RTCP, RSVP, or RTSP). The Ethernet device 20 can also receive real-time critical data traffic 23 via the Ethernet interface, e.g. a video data stream. For the transmission of real-time critical data traffic via an IP network, currently the
20 protocols RTP (Real-Time Protocol), RTCP (Real-Time Control Protocol), RSVP (resource ReSerVation Protocol), and RTSP (Real-Time Streaming Protocol) are used.

Let us assume that real-time critical video data stream 23 emanating from the
25 Ethernet device 20 shall be transmitted via the device network 21 to other network devices. The video data stream 23 is first passed to a content detection and routing layer 24, and said content detection and routing layer 24 detects that the arriving data stream utilizes one of the real-time critical protocol types. Therefore, the content type is identified as "real-time critical data traffic".
30 Accordingly, the real-time critical data stream is forwarded to a convergence layer 25 dedicated to handling "real-time critical data traffic". Besides the convergence layer 25, other content-specific convergence layers exist, e.g. the convergence layer 26, which is dedicated to handling "packet-based data traffic".

35 The content-specific convergence layer 25 establishes a content-specific connection with a corresponding convergence layer on the part of the target network device. In case real-time critical data traffic has to be transmitted, the convergence layer 25 reserves a certain predefined bandwidth when establishing

the connection to the respective target network devices. Then, the IP data packets of the real-time critical data traffic are segmented into a set of corresponding data packets of the internal protocol of the device network 21. This task can be carried out by a separate module which is a common part of the content-specific convergence layers 25 and 26. In case the device network 21 is a HiperLAN/2 network, 48 byte packets of the type LCH (Long Transport Channel) are used within the device network 21.

Now, the video data stream 23 of our example is transmitted via the device network 21 to the respective target network devices. There, the arriving data packets are forwarded to a content detection and routing layer 27. In case a target network device, e.g. a IEEE 1394 device 28 or an Ethernet device 29, has indicated that it is willing to accept a respective traffic type, the content detection and routing layer 27 forwards the received data stream to the respective target device. In case the Ethernet device 29 has indicated that it is willing to accept the video data stream, the received video data stream is routed (30) to the Ethernet device 29. There, the short LCH data packets are reassembled to build IP packets, and the real-time critical video data stream is again converted into an appropriate protocol for real-time critical data. The video data stream can then be forwarded to the IP network to which the Ethernet device 29 is connected.

So far, it has been described how the video data stream 23, which is an IP data stream, is converted to the device network's internal protocol and transmitted via said device network to another Ethernet device 29. The video data stream 23, which has emanated from an IP network, doesn't have to be routed to an Ethernet device, though. The content detection and routing layer 27 can also route the received real-time critical data stream to the IEEE 1394 device 28 when the IEEE 1394 device 28 requests it. On part of the IEEE 1394 device 28, the LCH data packets of the internal protocol are reassembled into a video data stream 31 according to the IEEE 1394 protocol. The real-time critical video data stream can then be forwarded to the IEEE 1394 network to which the IEEE 1394 device 28 is connected. The inventive concept of content-specific convergence layers and content-specific routing allows to transform a real-time critical IP data stream into an IEEE 1394 data stream. Besides that, it is also possible to transmit the real-time critical video data stream 23 emanating from the Ethernet to both an Ethernet device 29 and a IEEE 1394 device 28.

In the following, a second example will be discussed. On the part of the Ethernet device 20, regular IP traffic 22 is received from the Internet. The regular IP traffic is passed to the content detection and routing layer 24, which detects that the content type is "packet-based data traffic", which is not real-time critical. The
5 regular IP traffic 22 is then passed to the convergence layer 26, which is dedicated to handling "packet-based data traffic". The IP packets are segmented into the LCH data packets used within the HiperLAN/2 network. A connection is set up within the device network 21, and the data traffic is transmitted to the content detection and routing layer 27. From there, the traffic can be routed to
10 the Ethernet device 29. The received packets of the internal protocol are reassembled into IP packets, and the IP data stream 32 is obtained.

Alternatively or additionally, the data traffic can be routed from the content detection and routing layer 27 to the IEEE 1394 device 28. There, the received
15 packets of the internal protocol are reassembled into data packets according to the IEEE 1394 standard. Though the IEEE 1394 standard is intended for the transmission of audio and video data streams in the first place, it is also possible to transmit IP data packets via an IEEE 1394 interface. This is called "IPover1394". Such an "IPover1394" data stream 33 is obtained on the part of the
20 IEEE 1394 device 28.

Both real-time critical data streams and regular packet-based data traffic can also emanate from a IEEE 1394 device 34 that is connected to an external IEEE 1394 network. The video data stream 35 can be transmitted from the IEEE 1394
25 device 34 via the convergence layer 25 and the device network 21 to the IEEE 1394 device 28, or to the Ethernet device 29, or to both said devices. The IPover1394 data traffic 36 is passed to the convergence layer 26, which handles packet-based data traffic. Via the device network 21, the data traffic is routed to the IEEE 1394 device 28, or to the Ethernet device 29, or to both said devices.

30

In Fig. 4, the so-called protocol stack for the HiperLAN/2 standard is shown. The bottom layer is the Physical Layer 37, which deals with the modulation type and the actual data transmission. The next layer is the Medium Access Control (MAC) 38, which is part of the Data Link Control Layer (DLC) 39. The MAC 38 schedules
35 the data for transmission. A TDMA (Time Division Multiple Access) frame with time slots of 2 ms is used, and the MAC 38 assigns time slots of the TDMA frame to the various connections within the HiperLAN/2 network. The TDMA frame generated by the MAC 38 is the typical transmission standard in the HiperLAN/2

protocol. The Data Link Control Layer 39 further comprises an Error Control functionality 40. Furthermore, the Data Link Control Layer 39 comprises a Radio Link Control Sublayer (RLC) 41.

- 5 The highest layers of the HiperLAN/2 standard are the convergence layers 42, which comprise a content type detection and routing layer 43, a set of content-specific convergence layers 44, 45, and a common part 46 of said convergence layers. The content type detection and routing layer 43 detects the content type of arriving data traffic and passes said traffic to a corresponding content-specific
10 convergence layer. The convergence layer 44 handles packet-based data traffic, whereby the convergence layer 45 handles real-time critical data traffic.

The common part 46 segments the variable size data packets of the respective external protocol into a multitude of data packets according to the HiperLAN/2
15 standard. Besides that, the common part 46 converts HiperLAN/2 packets into data packets of an external protocol by reassembling the HiperLAN/2 packets.

The respective hardware connectivity is addressed by means of drivers 47, 48, 49. The convergence layer 47 is responsible for handling the PPP (point-to-point)
20 protocol, which is an external protocol used for point-to-point connections. The driver 48 supports the IEEE 1394 protocol, and the driver 49 supports the Ethernet protocol.

In Fig. 5, it is shown how higher layer packets, for example Ethernet packets, are
25 mapped onto layers of the HiperLAN/2 standard. Again, the Physical Layer PHY is the bottom layer, and a PHY burst 52 comprising several Long Transport CHannel Packets (LCH) is shown. At the Data Link Control Layer (DLC), a Long Transport CHannel Packet (LCH) 53 is divided into a header 54, a DLC SDU 55, and a Cyclic Redundancy Check (CRC) 56. At the Convergence Layer (CL), the
30 DLC SDU 55 is divided into 12 bits of flags (57) and 384 bits or 48 bytes of Payload (58). A higher layer packet, e.g. an Ethernet packet 59, is segmented into a multitude of these 48 bytes packets 58, 60, which are transmitted as LCH packets according to the HiperLAN/2 standard.

EPO - Munich
6308.061
08. Juli 2002**Claims**

1. Network device for a device network, **characterized by**

- 5 - a content detection layer (24, 43) for detecting the content type of external traffic received by said network device, and for passing said external traffic, in dependence of the detected content type, to a content-specific convergence layer (25, 26, 44, 45) dedicated to handling the respective content type, and
- 10 - a set of content-specific convergence layers (25, 26, 44, 45), which exchange network traffic with other network devices (28, 29) of said device network (21) via content-specific connections, whereby said content-specific connections are suited to the requirements of the respective content type.

15 2. Network device according to claim 1, **characterized in that** one of said content types is real-time critical data, whereby said set of content-specific convergence layers comprises a convergence layer dedicated to handling real-time critical data.

20 3. Network device according to claim 1 or 2, **characterized in that** one of said content types is packet-based data, whereby said set of content-specific convergence layers comprises a convergence layer dedicated to handling packet-based data.

25 4. Network device according to anyone of the preceding claims, **characterized in that** said external traffic being at least one of Ethernet traffic, IEEE 1394 traffic, UMTS traffic or PPP traffic.

30 5. Network device according to anyone of the preceding claims, **characterized in that** said network device comprises hardware connectivity for at least one of one of Ethernet traffic, IEEE 1394 traffic, UMTS traffic or PPP traffic.

35 6. Network device according to anyone of the preceding claims, **characterized in that** said network device is an access point of said device network.

7. Network device according to anyone of the preceding claims, **characterized in that** said content detection layer analyses if said Ethernet

traffic is real-time critical traffic, whereby in case said Ethernet traffic is real-time critical, it is passed to a convergence layer dedicated to handling real-time critical data.

5 8. Network device according to anyone of the preceding claims,
characterized in that said content detection layer analyses if said Ethernet
traffic is not real-time critical traffic, whereby in case said Ethernet traffic is not
real-time critical, it is passed to a convergence layer dedicated to handling
packet-based data.

10 9. Network device according to anyone of the preceding claims,
characterized in that said content detection layer analyses if said IEEE 1394
traffic is packet-based data traffic, whereby in case said IEEE 1394 traffic is
packet-based data traffic, it is passed to a convergence layer dedicated to
15 handling packet-based data.

10. Network device according to anyone of the preceding claims,
characterized in that said content detection layer analyses if said IEEE 1394
traffic is real-time critical data traffic, whereby in case said IEEE 1394 traffic is
20 real-time critical data traffic, it is passed to a convergence layer dedicated to
handling real-time critical data.

11. Network device according to anyone of the preceding claims,
characterized in that said content-specific convergence layers comprise a
25 common part, which segments data packets of said external traffic into a
multitude of corresponding data packets of said device network's internal
protocol, and which reassembles data packets of said device network's internal
protocol into corresponding data packets of the respective external traffic.

30 12. Network device according to anyone of the preceding claims,
characterized in that said content-specific convergence layers are operable to
be used simultaneously within the same device network.

13. Device network, comprising at least one network device according to
35 anyone of claims 1 to 12.

14. Device network according to claim 13, **characterized in that** content-
specific connections are set up and released between the network devices of said

device network, whereby a content-specific connection is set up between a content-specific convergence layer of a first network device which supports a certain content type, and a respective content-specific convergence layer of a second network device which supports the same content type.

5

15. Device network according to claim 13 or 14, **characterized in that** the external traffic exchanged with said content-specific convergence layer of said first network device may be of a different kind than the external traffic exchanged with said content-specific convergence layer of said second network device.

10

16. Device network according to anyone of claims 13 to 15, **characterized in that** in case said content-specific connection is for a content type which requires a quality of service feature, a fixed bandwidth is reserved for said content-specific connection.

15

17. Device network according to anyone of claims 13 to 16, **characterized in that** for each content-specific connection, the content type supported by said content-specific connection is registered.

20

18. Device network according to anyone of claims 13 to 17, **characterized in that** said device network is a wireless local area network (WLAN), and in particular a HiperLAN/2 network.

25

19. Device network according to anyone of claims 13 to 18, **characterized in that** the exchange of control messages and data packets between different network devices of said device network is effected according to a TDMA transmission scheme.

30

20. Device network according to claim 19, **characterized in that** a set of time slots of said TDMA transmission scheme may be reserved for a certain content-specific connection.

35

21. Method for transmitting data traffic via a device network, **characterized by the following steps:**

- detecting a content type of external traffic arriving at the device network,

- passing said external traffic, in dependence of the detected content type, to a content-specific convergence layer (25, 26, 44, 45) dedicated to handling the respective content type, and
- transmitting network traffic to other network devices (28, 29) via content-specific connections, whereby said content-specific connections are suited to the requirements of the respective content type.

22. Method according to claim 21, **characterized in that** content-specific connections are set up between two network devices before transmitting said network traffic between said two network devices in accordance with said content type.

23. Method according to claim 21 or 22, **characterized in that** after the network traffic between said two network devices has been transmitted in accordance with said content type, said content-specific connection between said two network devices is released.

24. Computer program product comprising computer program means adapted to perform the method steps as defined in anyone of claims 21 to 23 when being executed on a computer, a digital signal processor or the like.

25. Computer readable storage means, storing thereon a computer program product according to claim 24.

Abstract**Convergence layers for network devices and
method for transmitting data traffic**EPO - Munich
68
08. Juli 2002

5

A network device for an ad-hoc established device network is described, which comprises a content detection layer for detecting the content type of external traffic received by said network device. According to the content type, the external traffic is routed to a content-specific convergence layer dedicated to

10 handling the respective content type. Said content-specific convergence layers exchange network traffic with other network devices via content-specific connections that are suited to the requirements of the respective content type. On the part of a target network device, the received data stream can be routed to any external protocol. Thus, the device network allows interoperability between

15 different external networking protocols.

(Fig. 3)

EPO - Munich
53
08. Juli 2002

1/5

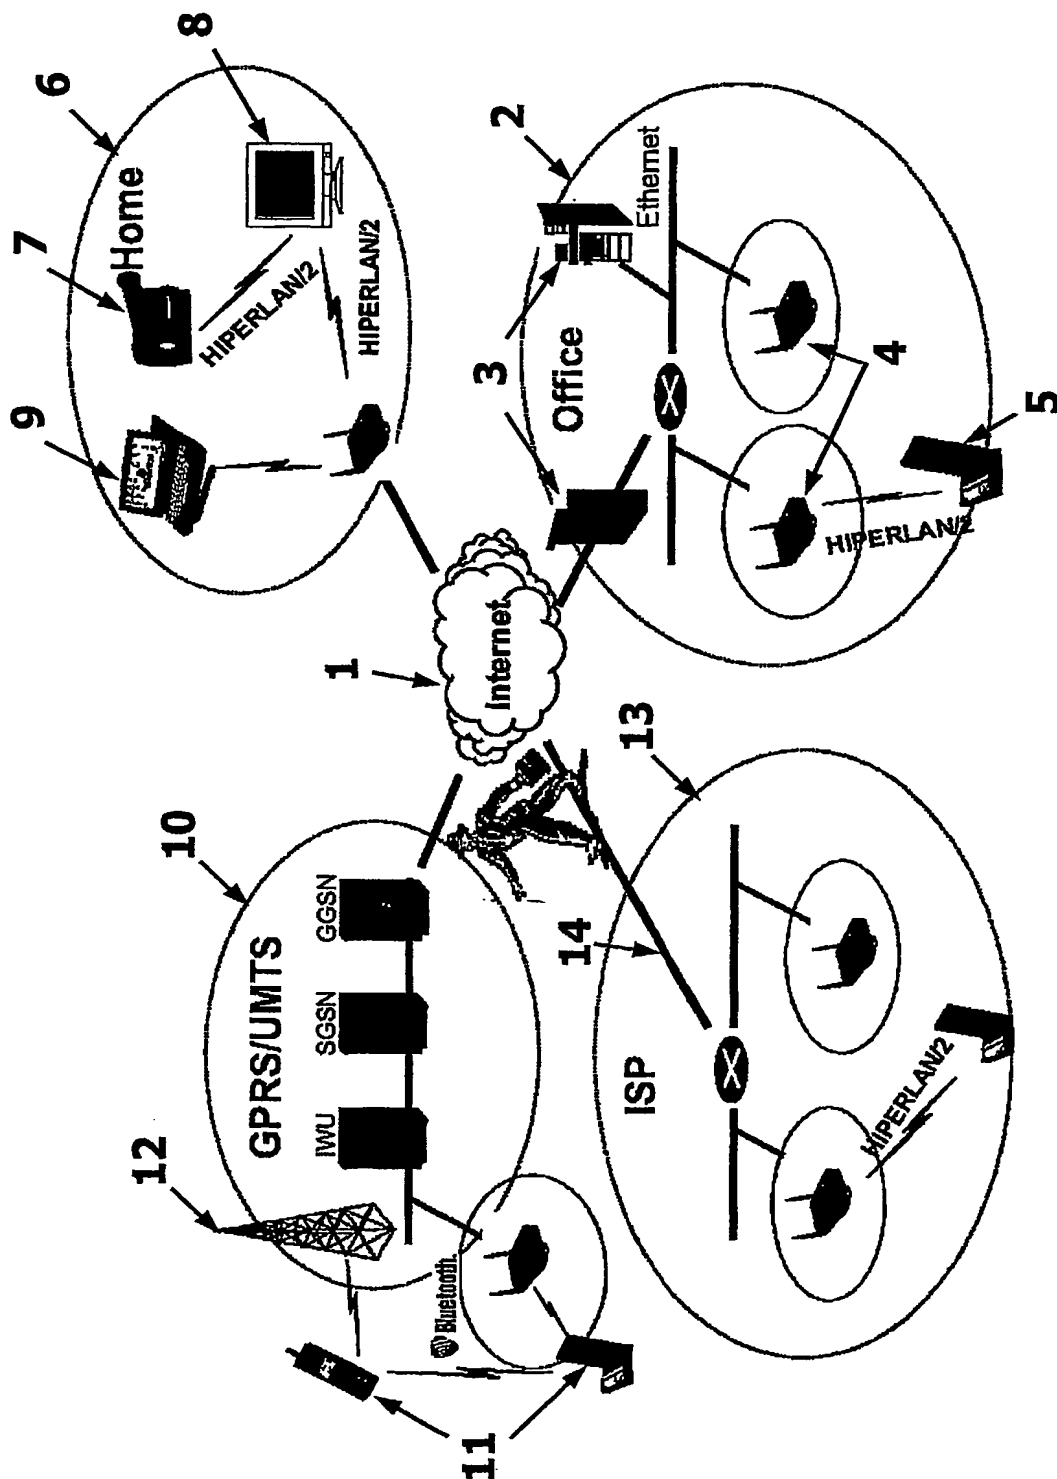


Figure 1

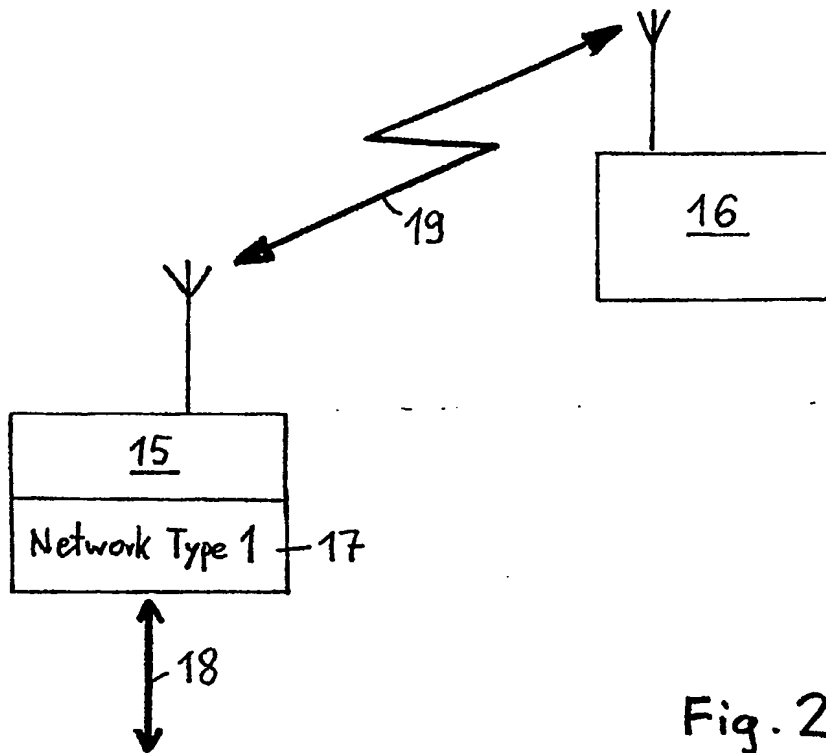


Fig. 2
Prior Art

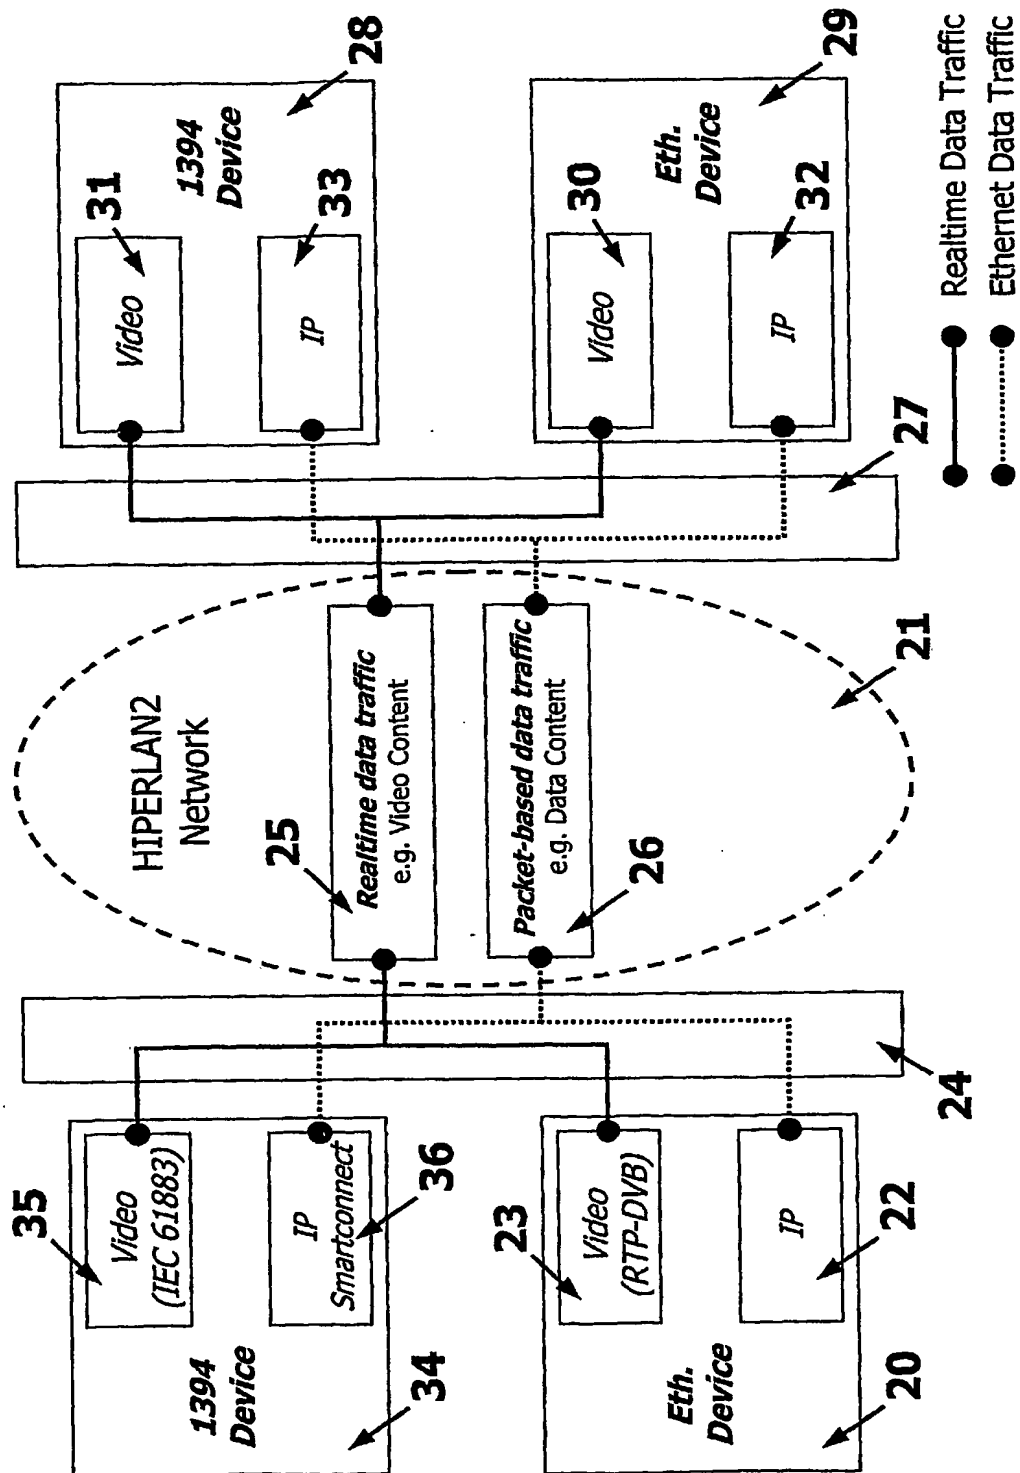


Figure 3

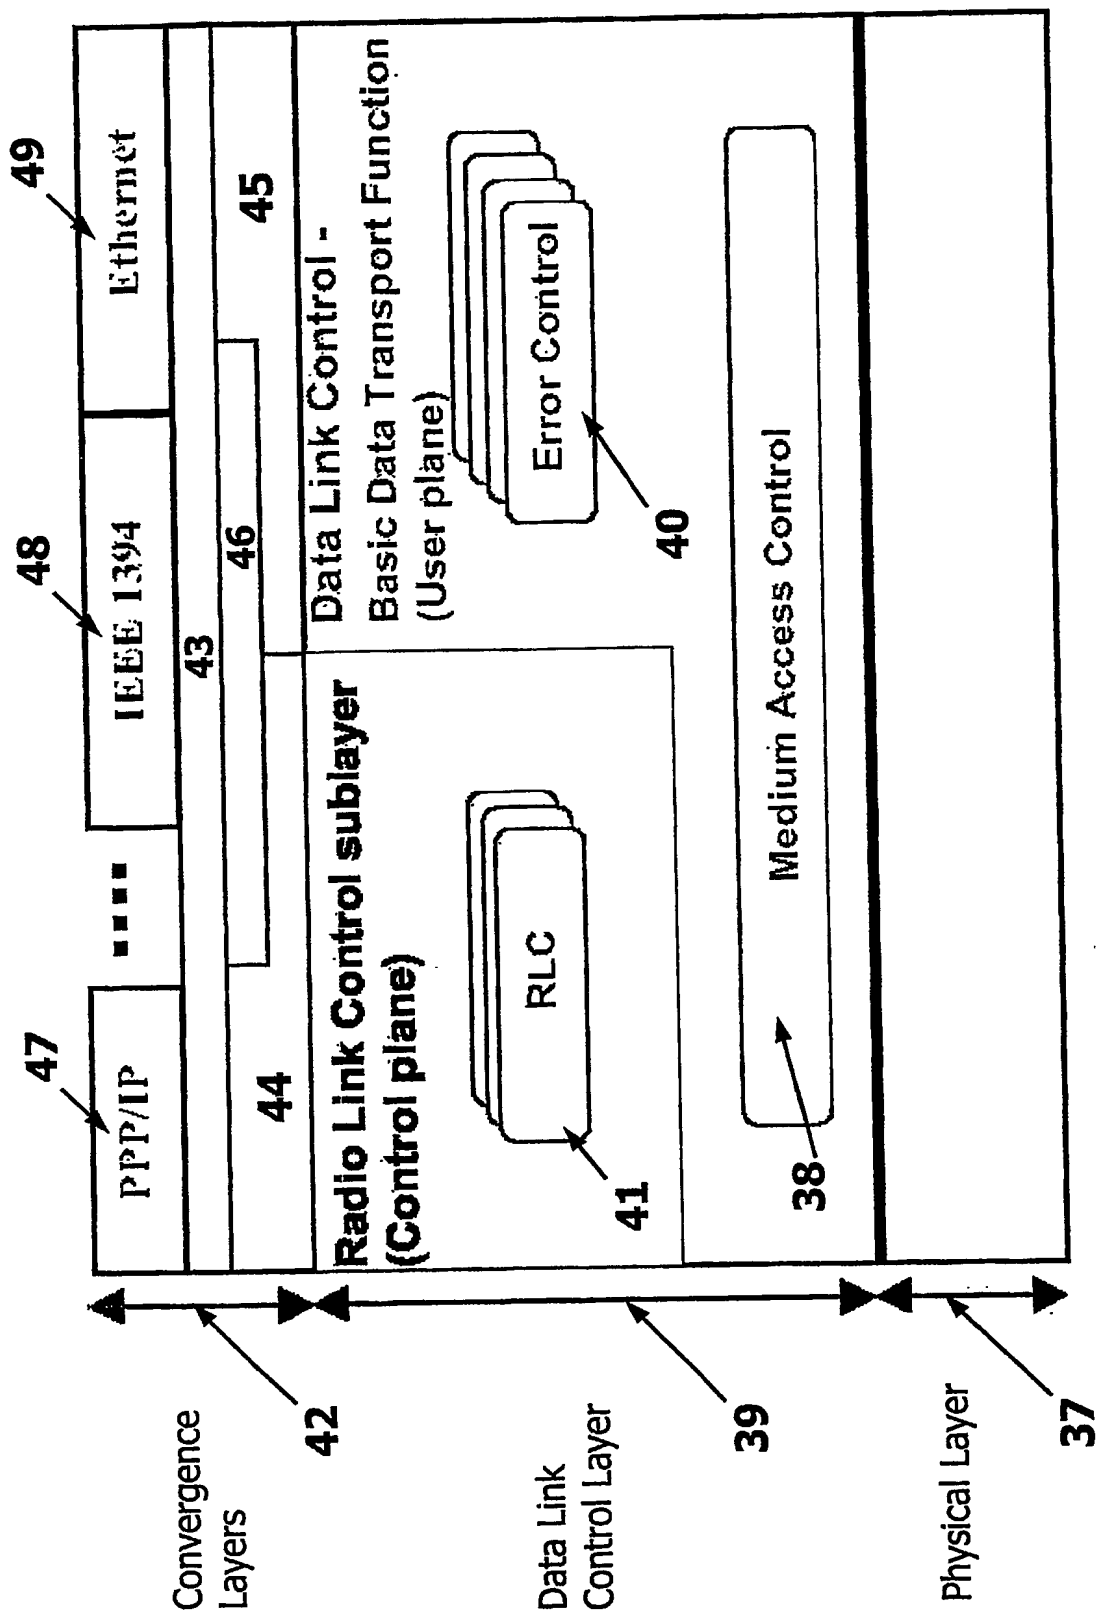


Figure 4

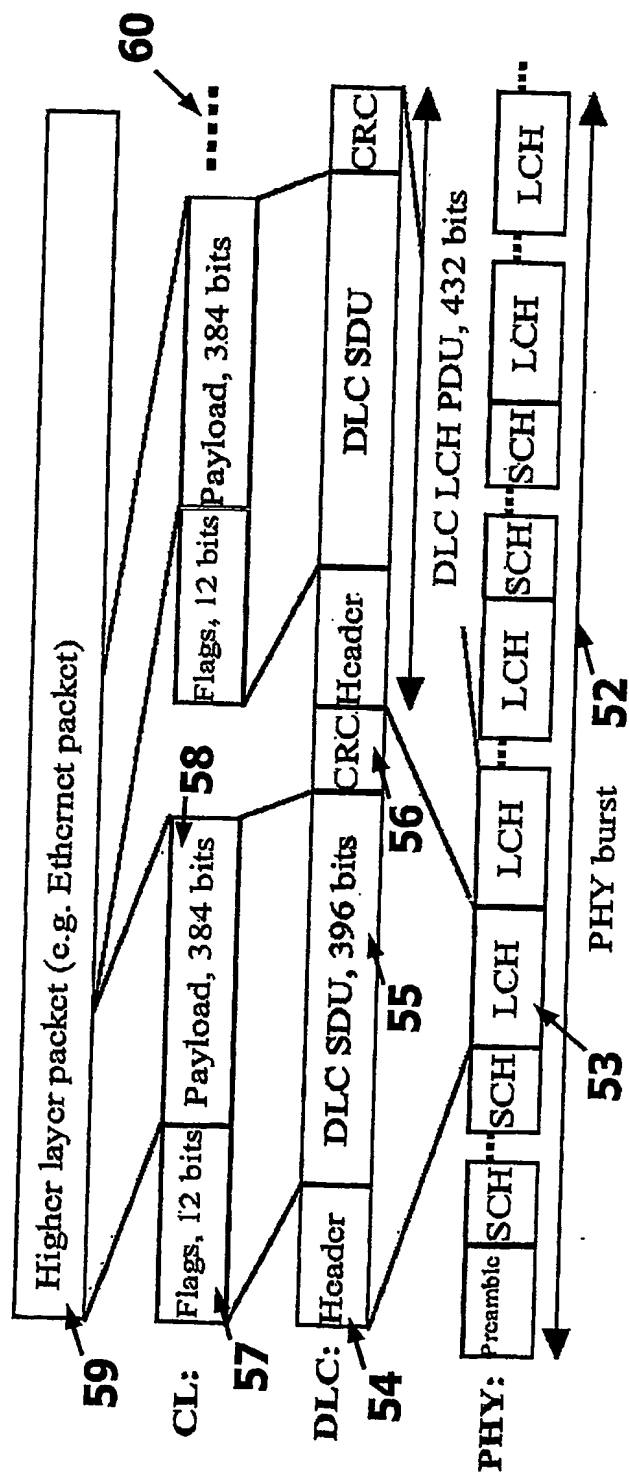


Figure 5